

Largest display in the
PowerView line at 15 inches

Boasts high-speed processor
and ultra wide-format display

Doubles the ram and storage
of the PV1200

Bonded glare-free LCD screen
for superior visibility in sunlight



THE LARGEST DISPLAY IN THE POWERSVIEW LINE-UP BRINGS ULTIMATE PERFORMANCE TO RUGGED APPLICATIONS.

The PV-U150 is the all new flagship display in the PowerView line up, leading the way for the introduction of the Ultimate Series.

Designed specifically to address the unique needs of the recreation marine market, the PV-U150 builds off of the tried-and-true PV1200.

The Best gets Better!

- Double the ram and storage*
- A larger screen and higher resolution*
- Improved Bluetooth 5 technology*
- Same all day, all weather visibility (1000 Nits)*
- Same high horsepower processor*
- Same rugged IP67 rating*
- Same trusted I/O*
- Adds support for A2B audio and two simultaneous digital video streams over ethernet

*Compared to the PV1200

INTRODUCING THE POWERSVIEW ULTIMATE SERIES

BUILT FOR POWERSVIEW:

PowerVision Configuration Studio® software version 4.0+ lets programmers design stunning user interfaces, create intelligent applications with scripting and prototyping quickly with a vast library of standard engine parameters.




**IP
67**

PV-U150™

171 2048 04-2022

DIMENSIONS

IMAGES DO NOT REFLECT ACTUAL DISPLAY - FOR EXAMPLE ONLY

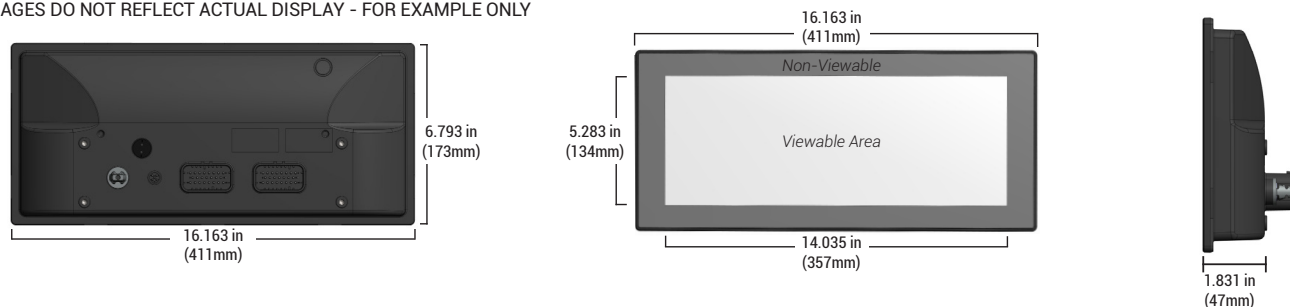

PRODUCT SPECIFICATIONS

COMPUTING	
PROCESSOR	Renesas® R-Car M2 with Arm® Cortex®-A15 dual-core processor @ 1.5 GHz (32-bit)
OPERATING SYSTEM	QNX® Realtime Operating System
STORAGE	16GB eMMC flash for operating systems and applications
RAM	1 GB
GRAPHICS	Renesas graphics processor
DISPLAY/HMI	
SCREEN	15-inch, LVDS TFT LCD w/ LED backlight 24bit color
RESOLUTION	1920 x 720
CONTRAST RATIO / BRIGHTNESS	1000:1, 1000 cd/m²
TOUCH PANEL	Projected capacitive (PCAP) with glove touch
SURFACE	Anti-glare finish
AUDIO/VIDEO	
ANALOG VIDEO	4x Analog Inputs (NTSC & PAL)
DIGITAL VIDEO	2x Simultaneous streams over ethernet (720 @ 30 FPS)
AUDIO	JDAB Radio Controls 1x A2B connection outputs AM, FM, FM HD, and DAB radio 2x Analog audio line inputs 3x AMP turn on outputs 5x differential stereo audio line

INTERFACES	
CAN	2CAN J1939
SERIAL	2x USB 2.0, 1x RS-485
WIFI	802.11(a, b, g, n)
ETHERNET	100MB M12 Code D Connection
BLUETOOTH	Bluetooth 5.0
INPUTS	5x Digital (active high or low) 3x Analog (0-5VDC, 2-20mA) 1x Frequency in (0.5Hz - 20kHz) 2x Antenna inputs via FAKRA connector
OUTPUTS	2x Frequency outputs 1x 500mA switched low-side
ELECTRICAL/ENVIRONMENTAL	
OPERATING VOLTAGE	6-36 VDC, reverse polarity protected
OPERATING TEMPERATURE	-30C to 70C
PROTECTION	IP67
VIBRATION	ISOv 15003
SHOCK	+/-50G in 3 axes
EMC/EMI	SAE J1113, ISO 13766, CE per 2014/30/EU

⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer. For more information, go to www.P65Warnings.ca.gov.

FOR MODEL & PART INFORMATION

ENOVATIONCONTROLS.COM

FOR MANUAL & SUPPORT DOCUMENTS

SUPPORT.ENOVATIONCONTROLS.COM

FOR SUPPORT & WARRANTY

ENOVATIONCONTROLS.COM/SUPPORT

SALES CONTACT



CONTACT

✉ sales@novationcontrols.com

☎ +1 918.317.4100

www.novationcontrols.com

CORPORATE HEADQUARTERS

5311 S 122nd E Ave
Tulsa, Oklahoma, USA 74146

United States • United Kingdom • India • China



FM 28221 (Tulsa, OK-USA)
FM 29422 (UK)